

GEORGIAN™ & GEORGIAN HIGH WASHABILITY

Square Lay-in & Tegular
medium texture



Georgian Beveled Tegular with Prelude® 15/16" suspension system (Pg. 259)


KEY SELECTION ATTRIBUTES

- Unique spatter-painted visual
- Excellent sound absorption (Items 795, 796)
- High Washability items available
 - Meets USDA/FSIS guidelines for use in food processing establishments
- Durable –
 - Washable
 - Scrubable
 - Impact-resistant
 - Scratch-resistant
- 30-Year Limited System Warranty against visible sag (excludes item 791 and other sizes), mold/mildew, and bacterial growth

TYPICAL APPLICATIONS

- Schools/classrooms (Items 795, 796)
- Corridors/conference rooms
- Kitchen/food preparation (Items 793, 794)

DETAIL (Other Suspension Systems compatible. Refer to listing on page 182.)



1. Georgian Beveled Tegular
2. Georgian Beveled Tegular with Prelude 15/16" suspension system
3. Georgian Beveled Tegular with Silhouette® 9/16" suspension system 1/4" Reveal

COLOR



GEORGIAN™ & GEORGIAN HIGH WASHABILITY

Square Lay-in & Tegular
medium texture

UP TO **55%** RECYCLED CONTENT

LEED®

- acoustics
- energy
- daylight & views
- indoor air quality
- renewable materials
- recycled content
- waste mgmt
- local* materials

Calculate LEED contribution at armstrong.com/greengenie

*LOCATION DEPENDENT




VISUAL SELECTION

PERFORMANCE

Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 273-277 armstrong.com/catdwgs	Item No.	Dimensions (Inches)	Acoustics		Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability				Recycled Content*	Recycle Program	Warranty*
				NRC	CAC						Wash	Scrub	Impact	Scratch			
GEORGIAN																	
UL Classified																	
15/16" Square Lay-in	1	764	24 x 24 x 5/8"	0.55	33	Class A	0.86	•	•	•	•	•	•	•	Std	•	30
	1	763	24 x 48 x 5/8"	0.55	33	Class A	0.86	•	•	•	•	•	•	•	Std	•	30
15/16" Beveled Tegular	15	1752	24 x 24 x 5/8"	0.55	35	Class A	0.86	•	•	•	•	•	•	Std	•	30	
9/16" Beveled Tegular	29, 44, 48, 52, 56, 60	1753	24 x 24 x 5/8"	0.55	35	Class A	0.86	•	•	•	•	•	•	Std	•	30	
School Zone™ GEORGIAN																	
15/16" Square Lay-in	1	796	24 x 24 x 3/4"	0.65	35	Class A	0.86	•	•	•	•	•	•	High	•	30	
	1	795	24 x 48 x 3/4"	0.65	35	Class A	0.86	•	•	•	•	•	•	High	•	30	
	1	898	24 x 48 x 3/4"	0.55	35	Fire Guard	0.86	•	•	•	•	•	•	Std	•	30	
	1	791	30 x 60 x 3/4"	0.55	33	Class A	0.86	•	Std	•	•	•	•	Std	•	1	
	1	Other Sizes	W: 12" - 30" / L: 18" - 72" 3/4" Thick	0.55	33	Class A	0.86	•	Std	•	•	•	•	Std	•	1	
GEORGIAN – High Washability, Unperforated																	
15/16" Square Lay-in	1	794	24 x 24 x 5/8"	N/A	33	Class A	0.88	•	•	•	•	•	•	Std	•	30	
	1	793	24 x 48 x 5/8"	N/A	33	Class A	0.88	•	•	•	•	•	•	Std	•	30	

SUSPENSION SYSTEMS

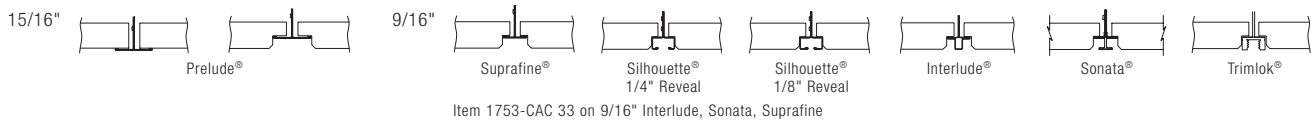

PHYSICAL DATA

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied vinyl latex paint

Fire Performance
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled) Fire Guard™: A fire resistive ceiling when used in applicable UL assemblies

ASTM E1264 Classification
Type III, Form 2, Pattern C E
Items 794, 793, 828 –
Type IX, Form 2, Pattern G
Fire Class A

Sag Resistance
HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications. (Excludes Item 791 and other sizes.)

Anti Mold/Mildew & Bacteria
BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

VOC Emissions
Third party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

High Recycled Content*
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value
R Factor - 1.6 (BTU units)
R Factor - 0.28 (Watts units)

30-Year Performance Guarantee & Warranty*
When installed with Armstrong Suspension System. Details at armstrong.com/warranty

Weight; Square Feet/Carton
763, 793 – 0.67 lbs/SF; 96 SF/ctn
764, 794, 1752, 1753 – 0.72 lbs/SF; 64 SF/ctn
791 – 0.76 lbs/SF; 75 SF/ctn
898 – 1.13 lbs/SF; 64 SF/ctn
796 – 1.31 lbs/SF; 48 SF/ctn
795 – 1.38 lbs/SF; 64 SF/ctn

Minimum Order Quantity
1 carton, excludes other sizes

Metric Items Available
1753M, 764M, 763M, 791M, 1752M, 796M, 795M, 794M, 793M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

