

LINEAGE™ Wood Looks Laminate Plank Ceilings

UP TO **95%** RECYCLED CONTENT

LEED®

acoustics

energy

daylight & views

indoor air quality

renewable materials


recycled content

waste mgmt

local* materials

Calculate LEED contribution at armstrong.com/greengenie

*LOCATION DEPENDENT

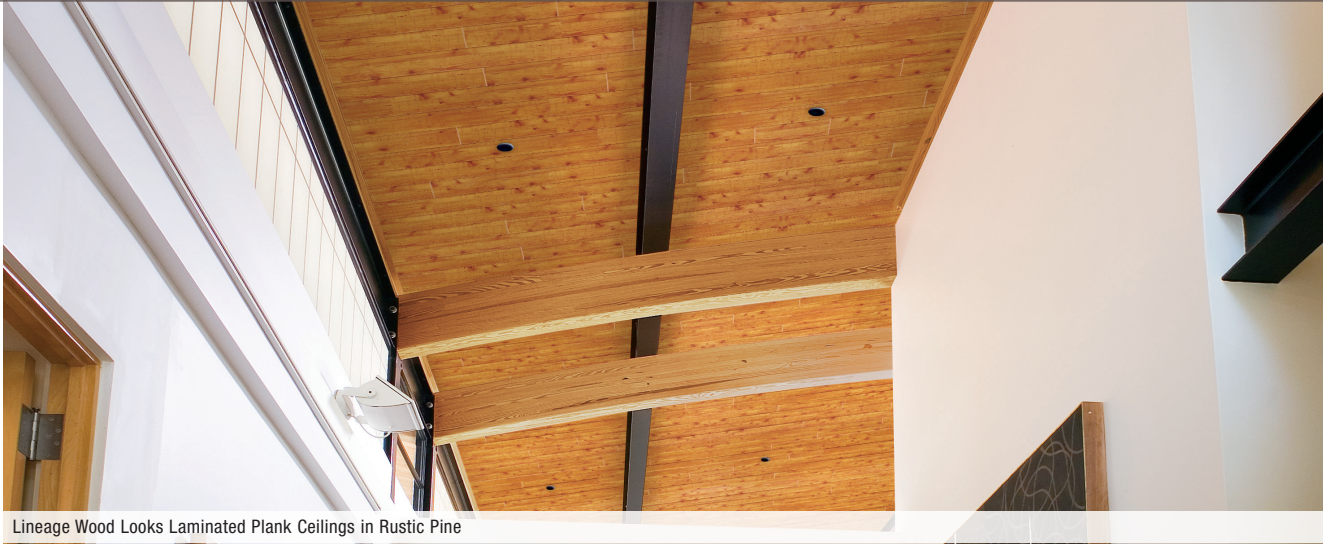

Lineage Wood Looks Laminated Plank Ceilings in Rustic Pine

KEY SELECTION ATTRIBUTES

- Natural, consistent wood-grain look
- Economical alternative to custom millwork
- Pre-finished, durable surface – Washable, Scrubbable
- Maintenance-free; easy installation
- Paintable (Item 1480WHT)



TYPICAL APPLICATIONS

- Hospitality
- Retail/boutiques
- Restaurants
- Condominiums/apartments

VISUAL SELECTION

PERFORMANCE

Dots represent high level of performance.

| Edge Profile | Suspension Detail Dwg. Pgs. 226-228 | Item Number | Dimensions | Fire Rating | Light Reflect | Durability | | Recycled Content | Warranty† |
|--|-------------------------------------|-------------|--|-------------|---------------|------------|-------|------------------|--------------------|
| | | | | | | Wash | Scrub | | |
| Beveled Tongue & Groove  | 64 | 1480_ _ _ * | 5" x 7' x 3/8"  | Class C | 0.85** • | • | • | High | No. of Years 30 |

* When specifying or ordering, use the appropriate color suffix with the item number. Example: To order Lineage White, specify item 1480 W H I.

** White planks only.

FINISH SELECTION

Due to printing limitations, shade may vary from actual product.



White (WHT)
(Paintable)


Rustic Pine (RPN)

White Wash (WHW)

Natural Cherry (NCH)

Clear Maple (CLM)

DETAIL



1. Tongue and Groove Edge
2. Beveled Edge

PHYSICAL DATA

Material

Items 1480, RPN, WHW, NCH, CLM – Medium Density Fiberboard (MDF) with printed paper laminate
Item 1480WHT – Painted Medium Density Fiberboard (MDF)



Surface Finish
Urethane-based topcoat

Fire Performance

Class C per IBC. Flame Spread Index of 200 or less and Smoke Developed Index of 450 or less when tested in accordance with ASTM E84.

Please check building code or local code professional for appropriate building applications.

Typical Suspension Systems

Installs directly to metal or wood furring. Installation clips included with each carton.

Application Considerations

Not available in Canada.

30-Year Performance Guarantee & Warranty†

When installed with Armstrong Suspension System. Details at armstrong.com/warranty

Weight; Square Feet/Carton
1.62 lbs/SF; 29 SF/ctn

Minimum Order Quantity
1 carton