


DUNE™


Square Lay-in & Tegular fine texture



Items 1772, 1773,
1774, 1775, 1776



Dune Square Lay-in with Prelude® XL 15/16" suspension system (Pg. 259)

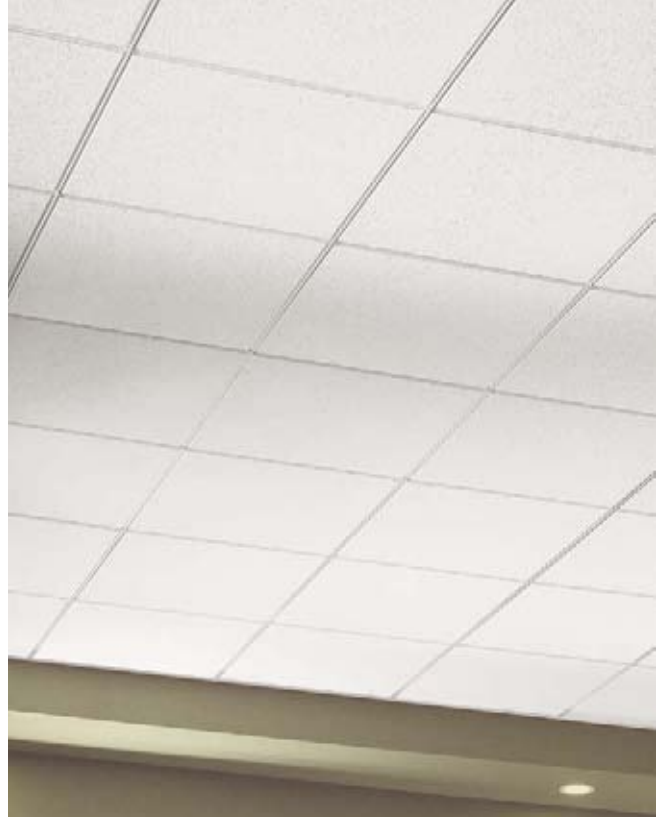

Dune Tegular with Interlude® XL 9/16" suspension system (Pg. 254)


KEY SELECTION ATTRIBUTES

- Upgrade look at a modest price
- Ceiling-2-Ceiling™ Post-consumer Recycled Content options: Items 1773HRC, 1774HRC, 1775HRC, 1776HRC, 1777HRC (check armstrong.com/greengenie)
- 100% Biobased content (see page 331)
- Durable
Scratch-resistant
- Non-directional visual reduces installation time and scrap
- 30-Year Limited System Warranty against visible sag (excludes items 1796 and 1798), mold/mildew, and bacterial growth

TYPICAL APPLICATIONS

- Offices
- Corridors
- Retail
- Hospitality
- Classrooms

DETAIL (Other Suspension Systems compatible. Refer to listing on page 168.)

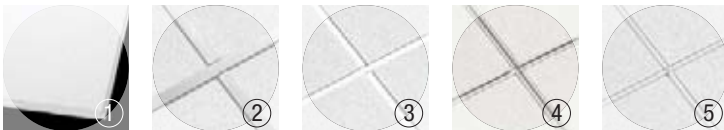

1. Dune Tegular
2. Dune Square Lay-in with Prelude 15/16" suspension system
3. Dune Tegular with Suprafine® 9/16" suspension system
4. Dune Tegular with Silhouette® XL 9/16" suspension system 1/4" Reveal
5. Dune Tegular with Interlude XL 9/16" suspension system

COLOR



White

DUNE™

Square Lay-in & Tegular

fine texture

HRC items contain 15% or greater post-consumer recycled ceilings



UP TO **56%** RECYCLED CONTENT

LEED®

acoustics energy daylight & views indoor air quality renewable materials recycled content waste mgmt local* materials

Calculate LEED contribution at armstrong.com/greengenie *LOCATION DEPENDENT

EPD AVAILABLE For select items only




VISUAL SELECTION

PERFORMANCE

Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 273-277 armstrong.com/catdwgs	Item No.	Dimensions (Inches)	Image	Acoustics		Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability	Primary (Embodied) Energy	Recycled Content*	Recycle Program	Warranty†
					NRC	CAC										
DUNE Square Lay-in																
15/16" Square Lay-in					UL Classified	BioBlock+	Humi-Guard+	Scratch	Below 11MJ/SF	Yes	No. of Years					
1		1772	24 x 24 x 5/8"		0.50	30	Class A	0.83	•	•	•	•	•	Std	•	30
1		1850	24 x 24 x 5/8"		0.50	35	Fire Guard	0.83	•	•	•	•	-	Std	•	30
1		1773 1773HRC	24 x 48 x 5/8"		0.50	33	Class A	0.83	•	•	•	•	•	Std High	•	30
1		1851	24 x 48 x 5/8"		0.50	35	Fire Guard	0.83	•	•	•	•	-	Std	•	30
1		1796	20 x 60 x 5/8"		0.50	35	Class A	0.83	•	Std	•	•	•	High	•	1
1		1798	30 x 30 x 3/4"		0.50	35	Class A	0.83	•	Std	•	•	•	High	•	1
1		Other Sizes	W: 12" - 30" / L: 18" - 72" 5/8" or 3/4" Thick		0.50	35	Class A	0.83	•	Std	•	•	-	Std	•	1
DUNE Tegular																
15/16" Angled Tegular																
11		1774 1774HRC	24 x 24 x 5/8" 24 x 24 x 5/8"		0.50	35	Class A	0.83	•	•	•	•	•	Std High	•	30
11		1853	24 x 24 x 5/8"		0.50	35	Fire Guard	0.83	•	•	•	•	-	Std	•	30
11		1776 1776HRC	24 x 48 x 5/8" 24 x 48 x 5/8"		0.50	35	Class A	0.83	•	•	•	•	•	Std High	•	30
11		Other Sizes	W: 12" - 30" / L: 18" - 72" 5/8" Thick		0.50	35	Class A	0.83	•	Std	•	•	-	Std	•	1
9/16" Beveled Tegular																
29, 44, 48, 52, 56, 60		1775 1775HRC	24 x 24 x 5/8" 24 x 24 x 5/8"		0.50	35	Class A	0.83	•	•	•	•	•	Std High	•	30
29		1852	24 x 24 x 5/8"		0.50	35	Fire Guard	0.83	•	•	•	•	-	Std	•	30
29, 44, 48, 52, 56, 60		1777 1777HRC	24 x 48 x 5/8" 24 x 48 x 5/8"		0.50	35	Class A	0.83	•	•	•	•	•	Std High	•	30
29, 44, 48, 52, 56, 60		Other Sizes	W: 12" - 30" / L: 18" - 72" 5/8" Thick		0.50	35	Class A	0.83	•	Std	•	•	-	Std	•	1

SUSPENSION SYSTEMS

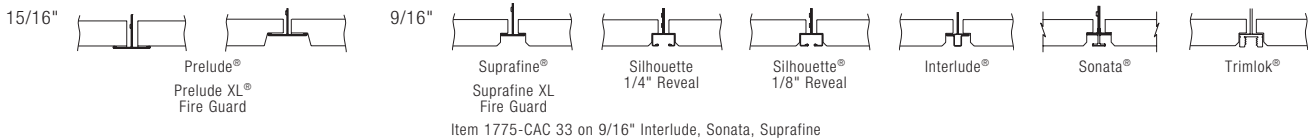

PHYSICAL DATA

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled) Fire Guard™: A fire resistive ceiling when used in applicable UL assemblies

ASTM E1264 Classification
Type III, Form 2, Pattern C E
Fire Class A

Sag Resistance
HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications. Excluding items 1796, 1798, and large other sizes.

Anti Mold/Mildew & Bacteria
BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

VOC Emissions
Third party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Primary (Embodied) Energy
See all LCA information on our EPD's.

High Recycled Content*
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value
R Factor – 1.6 (BTU units)
R Factor – 0.28 (Watts units)

30-Year Performance Guarantee & Warranty†
When installed with Armstrong Suspension System. Details at armstrong.com/warranty (Excludes item 1746, 1798, and large other sizes)

Weight; Square Feet/Carton
1772 – 0.94 lbs/SF; 64 SF/ctn
1773 – 0.88 lbs/SF; 80 SF/ctn
1796 – 1.33 lbs/SF; 67 SF/ctn
1798 – 1.14 lbs/SF; 50 SF/ctn
1850 – 1.19 lbs/SF; 48 SF/ctn
1851 – 1.22 lbs/SF; 64 SF/ctn
1774, 1775 – 0.75 lbs/SF; 64 SF/ctn
1776, 1777 – 0.75 lbs/SF; 80 SF/ctn
1852, 1853 – 1.20 lbs/SF; 48 SF/ctn

Minimum Order Quantity
1 carton, excludes other sizes

Metric Items Available
1772M, 1850M, 1773M, 1851M, 1796M, 1798M, 1775M, 1777M
Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

