

FINE FISSURED™

Tegular


medium texture



Items 1732, 1734, 1820, 1821 & 1833



Fine Fissured with Trimlok® 9/16" suspension system (Pg. 268)



Visit Armstrong.com Photo Gallery to view more installation photos

SEARCH: fine fissured

KEY SELECTION ATTRIBUTES

- Excellent sound absorption – Products help comply with ANSI S12.60 Classroom Guidelines: Items 1820, 1821, 1824, 1717, 1719
- Non-directional visual reduces installation time and scrap
- 30-Year Limited System Warranty against visible sag, mold/mildew, and bacterial growth

TYPICAL APPLICATIONS

- Schools
- Libraries/band rooms
- Conference rooms
- Corridors
- Discount stores
- Utility rooms

COLOR SELECTION

Due to printing limitations, shade may vary from actual product.



White (WH)



Cream (CR)



Haze (HA)



Camel (CM)



Platinum (PL)





Adobe (AD)

Item 1732 is available in colors. All other items are available in White only. Colored ceilings are dye-lotted and should be segregated by dye lot. Do not mix.

DETAIL

(Other Suspension Systems compatible. Refer to listing on page 176.)



1. Fine Fissured Beveled Tegular
2. Fine Fissured Angled Tegular
3. Fine Fissured Tegular with Suprafine® 9/16" suspension system

FINE FISSURED™

Tegular
medium texture

UP TO **55% RECYCLED CONTENT**

LEED®

acoustics energy daylight & views indoor air quality renewable materials recycled content waste mgmt local* materials

EPD AVAILABLE For select items only

Calculate LEED contribution at armstrong.com/greengenie *LOCATION DEPENDENT

VISUAL SELECTION


PERFORMANCE

Dots represent highest level of performance.

Edge Profile	Susp. Dwg. Pgs. 273-277 armstrong.com/catdwgs	Item No.	Dimensions (Inches)	Acoustics		Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability	Primary (Embossed) Energy	Recycled Content*	Recycle Program	Warranty*
				NRC	CAC										
FINE FISSURED Tegular															
15/16" Angled Tegular	12	1732_ _**	24 x 24 x 5/8"	0.55	35	Class A	0.85	•	•	•	Std	•	High	•	30
	12	1833	24 x 24 x 5/8"	0.55	35	Fire Guard	0.85	•	•	•	Std	-	Std	•	30
	12	1733	24 x 48 x 5/8"	0.55	35	Class A	0.85	•	•	•	Std	•	Std	•	30
	12	1834	24 x 48 x 5/8"	0.55	35	Fire Guard	0.85	•	•	•	Std	-	High	•	30
	12	Other Sizes	W: 12" - 30" / L: 18" - 72" 5/8" thick	0.55	35	Fire Guard	0.85	•	•	•	Std	-	Std	•	30
9/16" Beveled Tegular	29, 44, 48, 52, 56, 60	1734	24 x 24 x 5/8"	0.55	35	Class A	0.85	•	•	•	Std	•	Std	•	30
	29, 44, 48, 52, 56, 60	1835	24 x 24 x 5/8"	0.55	35	Fire Guard	0.85	•	•	-	Std	-	Std	•	30
	29, 44, 48, 52, 56, 60	Other Sizes	W: 12" - 30" / L: 18" - 72" 5/8" thick	0.55	35	Fire Guard	0.85	•	•	•	Std	-	Std	•	30
School Zone™ FINE FISSURED Tegular															
15/16" Angled Tegular	13	1717	24 x 24 x 3/4"	0.70	40	Class A	0.85	•	•	•	Std	-	High	•	30
	13	1820	24 x 24 x 3/4"	0.70	35	Fire Guard	0.85	•	•	•	Std	-	High	•	30
	13	1824	24 x 48 x 3/4"	0.70	35	Fire Guard	0.85	•	•	•	Std	-	High	•	30
	13	Other Sizes	W: 12" - 30" / L: 18" - 72" 3/4" thick	0.70	35	Fire Guard	0.85	•	•	•	Std	-	High	•	30
9/16" Beveled Tegular	29, 44, 48, 52, 56, 60	1719	24 x 24 x 3/4"	0.70	40	Class A	0.85	•	•	•	Std	-	High	•	30
	29, 44, 48, 52, 56, 60	1821	24 x 24 x 3/4"	0.70	35	Fire Guard	0.85	•	•	•	Std	-	High	•	30
	29, 44, 48, 52, 56, 60	Other Sizes	W: 12" - 30" / L: 18" - 72" 3/4" thick	0.70	35	Fire Guard	0.85	•	•	•	Std	-	High	•	30

**Add 2-letter color suffix to item number when specifying or ordering (e.g., 1732 C R)

SUSPENSION SYSTEMS

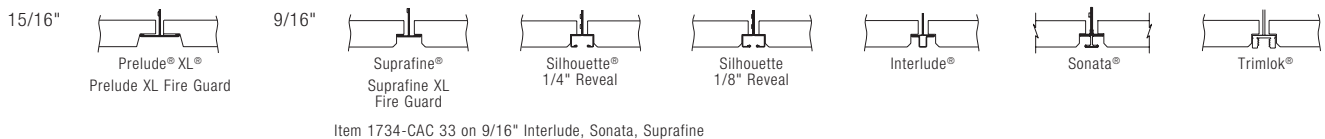

PHYSICAL DATA

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled) Fire Guard™: A fire resistive ceiling when used in applicable UL assemblies

ASTM E1264 Classification
Type III, Form 2, Pattern C E Fire Class A

Sag Resistance
HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications.

Anti Mold/Mildew & Bacteria
BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

VOC Emissions
Third party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol (excludes item 1732 in colors and item 1835).

High Recycled Content*
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value
R Factor – 1.5 (BTU units)
R Factor – 0.26 (Watts units)

30-Year Performance Guarantee & Warranty*
When installed with Armstrong Suspension System. Details at armstrong.com/warranty

Weight; Square Feet/Carton
1820, 1821 – 1.31 lbs/SF; 48 SF/ctn
1824 – 1.20 lbs/SF; 64 SF/ctn
1732, 1734 – 0.70 lbs/SF; 64 SF/ctn
1733 – 0.70 lbs/SF; 80 SF/ctn
1833, 1835 – 1.05 lbs/SF; 48 SF/ctn
1834 – 1.05 lbs/SF; 64 SF/ctn
1717, 1719 – 1.25 lbs/SF; 48 SF/ctn

Minimum Order Quantity
1 carton, excludes other sizes

Metric Items Available
1732M, 1733M, 1734M, 1820M, 1821M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

